

**HYDROGUARD® Series LFLM495 Thermostatic Mixing Valves for Lavatory Installations**

**Product Specification**

**LEAD FREE\***

**Features ■**

- Temperature control to ASSE 1069, 1070 down to 0.5 gpm
- Advanced thermal actuator improves performance at low flow
- Lead Free\* brass body construction for durability and to comply with Lead Free\* requirements
- Adjustable temperature selection with lock down
- Union connections for easy maintenance
- Integral checks and screen prevents cross-flow and contamination
- Available in 1/2", 3/4", 1" (15, 20, 25 mm) with NPT, Sweat, PEX, Quick-Connect, and CPVC union connections



**Specifications ■**

**Temperature Adjustment:**

80°- 120°F (27°C to 49°C)

**Approach Temperature:**

5°F (3°C) above set point

**Max. Operating Pressure:**

125psi (861 kPa)

**Max. Hot Water Temperature:**

200°F (93°C)

**Max. Pressure Differential**

25%

**between Hot & Cold Water Supplies:**

**Minimum Flow:**

0.5 gpm (1.90 lpm) when tested in accordance with ASSE 1069 and ASSE 1070

**Check Valves:**

Integral

**Construction:**

Lead Free\* Brass Body

**Listing:**

ASSE 1069, ASSE 1070 and IAPMO cUPC

UNION CONNECTIONS														
Female NPT			Sweat			CPVC			PEX			Quick-Connect		
1/2"	3/4"	1"	1/2"	3/4"	1"	1/2"	3/4"	1"	1/2"	3/4"	1"	1/2"	3/4"	1"
(15)	(20)	(25)	(15)	(20)	(25)	(15)	(20)	(25)	(15)	(20)	(25)	(15)	(20)	(25)
LFLM495-1	LFLM496-1	LFLM497-1	LFLM495-2	LFLM496-2	LFLM497-2	LFLM495-3	LFLM496-3	LFLM497-3	LFLM495-4	LFLM496-4	LFLM497-4	LFLM495-5	LFLM496-5	LFLM497-5

**Capacity ■**


PRESSURE DROP ACROSS THE VALVE							
(Cv) 1 psi (7 kPa)	5 psi (34 kPa)	10 psi (69 kPa)	15 psi (103 kPa)	20 psi (138 kPa)	30 psi (207 kPa)	45 psi (310 kPa)	60 psi (414 kPa)
1.79	4.0 gpm (15.0 lpm)	5.7 gpm (22.0 lpm)	7.0 gpm (26.0 lpm)	8.0 gpm (30.0 lpm)	9.8 gpm (37.0 lpm)	12.0 gpm (45.0 lpm)	13.9 gpm (53.0 lpm)

\* The wetted surface of this product contacted by consumable water contains less than one quarter of one percent (0.25%) of lead by weight.

## Dimensions ■

Model	LFLM495-1	LFLM496-1	LFLM497-1	LFLM495-2	LFLM496-2	LFLM497-2	LFLM495-3	LFLM496-3	LFLM497-3	LFLM495-4	LFLM496-4	LFLM497-4
Connections	1/2" NPT Female	3/4" NPT Female	1" NPT Female	1/2" Sweat	3/4" Sweat	1" Sweat	1/2" CPVC	3/4" CPVC	1" CPVC	1/2" PEX	3/4" PEX	1" PEX
"A"	4-7/8 (124mm)	4-7/8 (124mm)	5-5/16 (135mm)	4-13/16 (123mm)	5-5/16 (135mm)	5-13/16 (148mm)	4-3/4 (121mm)	5-1/4 (133mm)	5-11/16 (144mm)	5-1/4 (133mm)	5-1/2 (140mm)	5-7/8 (149mm)
"B"	5-7/16 (137mm)	5-7/16 (137mm)	5-5/8 (143mm)	5-3/8 (137mm)	5-5/8 (143mm)	5-7/8 (149mm)	5-5/16 (136mm)	5-9/16 (142mm)	5-13/16 (147mm)	5-9/16 (142mm)	5-11/16 (145mm)	5-7/8 (150mm)
"C"	3-3/16 (80mm)	3-3/16 (80mm)	3-3/8 (86mm)	3-1/8 (80mm)	3-3/8 (86mm)	3-5/8 (92mm)	3-1/16 (79mm)	3-5/16 (85mm)	3-9/16 (90mm)	3-5/16 (85mm)	3-7/16 (88mm)	3-5/8 (93mm)

Model	LFLM495-5	LFLM496-5	LFLM497-5
Connections	1/2" Quick-Connect	3/4" Quick-Connect	1" Quick-Connect
"A"	6-5/8 (168mm)	6-15/16 (177mm)	7-1/8 (181mm)
"B"	6-1/4 (159mm)	6-7/16 (163mm)	6-1/2 (165mm)
"C"	4 (102mm)	4-3/16 (106mm)	4-1/4 (108mm)

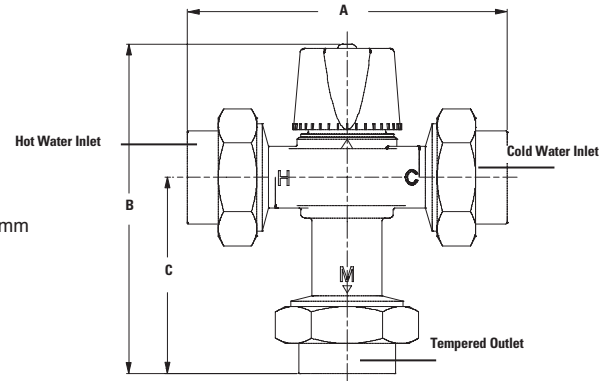

Note:  
Dimensions are shown  $\pm 1/4"$   
Dimensions in brackets are in mm

## Ordering Information ■

Model LFLM49  
(80° - 120° F)  
(27° - 49° C)

### Valve

1/2" .....	5
3/4" .....	6
1" .....	7

### Inlets

Union NPT Female .....	1
Union Sweat .....	2
Union CPVC .....	3
Union PEX .....	4
Quick-Connect .....	5

## Typical Specification ■

Thermostatic tempering valve shall be constructed using Lead Free\* brass material which shall comply with state codes and standards, where applicable requiring reduced lead content. The valve shall feature advanced paraffin-based actuation technology and union connections for ease of maintenance. All internal components shall be corrosion-resistant. Valve shall feature integral checks to prevent cross-flow and inlet screens to filter out debris. The valve shall be ASSE 1069, ASSE 1070 and IAPMO cUPC listed. Capacity of the valve shall be 12.0 gpm (45.0 lpm) at 45psi (310 kPa) differential. Valve shall perform to a minimum flow of 0.5 gpm (2 lpm) to ASSE 1070. Control temperature shall be adjustable between 80°F - 120°F (27 - 49°C). The valve shall feature a vandal-resistant lockable handle to prevent tampering. The valve shall be a Powers' HydroGuard® Model LFLM495 (1/2", 15mm), LFLM496 (3/4", 20mm), LFLM497 (1", 25mm). Any alternate must have a written approval prior to bidding.

### ENGINEERING APPROVAL

Project: \_\_\_\_\_  
Contractor: \_\_\_\_\_  
Architect/Engineer: \_\_\_\_\_

# POWERS™

A Watts Water Technologies Company



ISO 9001-2000  
CERTIFIED

USA: Phone: 1.800.669.5430 • Fax 1.847.229.0526 • www.powerscontrols.com  
Canada: Phone: 1.888.208.8927 • Fax 1.888.479.2887 • www.powerscontrols.ca