




## Dimensions ■

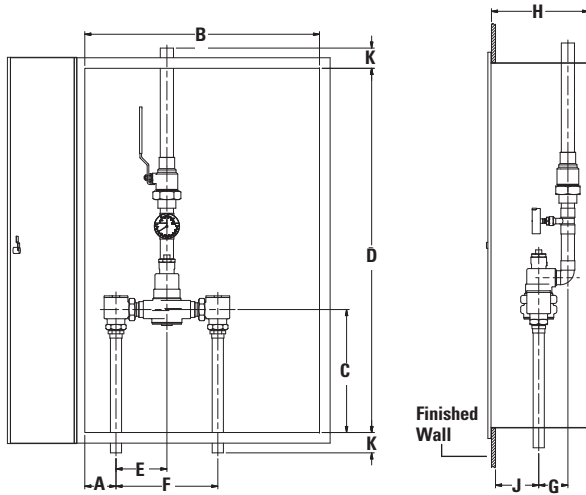

Valve	A	B	C	D	E	F	G	H	J	K
LFSH1432	3-7/8"	20"	14-3/4"	36"	4-5/8"	9-1/4"	2-3/4"	9"	4-1/2"	2"
	(98)	(508)	(375)	(914)	(117)	(235)	(70)	(229)	(114)	(50)
LFSH1434	3-7/8"	29"	15-1/4"	45"	6-1/4"	12-1/2"	3-5/8"	12"	5-7/8"	2-1/2"
	(98)	(737)	(387)	(1143)	(159)	(318)	(92)	(305)	(149)	(64)
LFSH1435	4-1/8"	38"	20-1/8"	55-3/4"	7-7/8"	15-3/4"	4-1/4"	13"	6"	2-1/2"
	(105)	(965)	(511)	(1416)	(200)	(400)	(108)	(330)	(152)	(64)

Note:  
Dimensions are shown  $\pm 1/2''$   
Dimensions in parentheses are in mm

Valve	Inlets	Outlet
LFSH1432	3/4" (20)	1" (25)
LFSH1434	1-1/4" (32)	1-1/2" (40)
LFSH1435	2" (50)	2" (50)

## Ordering Information ■



Valve	Order Code	View Port	Order Code
57 gpm (216 lpm)	LFSH1432	None	0
127 gpm (481 lpm)	LFSH1434	Window	W
201 gpm (761 lpm)	LFSH1435		
<b>Finish</b>		<b>Alarm System</b>	
Rough Bronze	A	None	0
Chrome Plated	C		
<b>Piping Inlets/Outlet</b>		<b>Option</b>	
Bottom/Top	E	None	0
		Cold Water Bypass	2
		T/P Gauge on Inlets	4
		C/W Bypass & T/P Gauge on Inlets	6
<b>Cabinet Style</b>		<b>Temperature Range</b>	
Stainless Steel, Recessed	N	90°F - 160°F (32°C - 71°C)	S
Painted, Recessed	R	60°F - 90°F (16°C - 32°C)	W

## Recirculation Piping Diagram ■

Please see Piping Diagram Section of this catalog.

## Typical Specification ■

Cabinet Supply Fixture (CSF) shall be factory assembled and tested and include a stainless steel or painted steel cabinet. CSF shall feature a HydroGuard® XP LFSH1430 series single-valve hi/lo with advanced paraffin-based actuation technology. The valves shall be constructed using Lead Free\* brass. Lead Free\* brass valves shall comply with state codes and standards, where applicable, requiring reduced lead content. CSF shall also include copper piping, ball valve(s) and temperature/pressure gauge for diagnostics. The tempering valve shall have union check stops, an outlet temperature range of 90 – 160°F (32° - 71°C) (with lockable means), a single seat design for positive shutoff and an approach temperature of 5°F (3°C). Minimum flows to ASSE 1017 shall be LFSH1432 (1.0 gpm, 4.0 lpm), LFSH1434 (1.0 gpm, 4.0 lpm), LFSH1435 (5.0 gpm, 19 lpm).

Valve shall be a Powers model \_\_\_\_\_. All alternatives must have written approval prior to bidding.

### ENGINEERING APPROVAL

Project: \_\_\_\_\_  
Contractor: \_\_\_\_\_  
Architect/Engineer: \_\_\_\_\_

# POWERS™

A Watts Water Technologies Company



ISO 9001-2000  
CERTIFIED

USA: Phone: 1.800.669.5430 • Fax 1.847.229.0526 • www.powerscontrols.com  
Canada: Phone: 1.888.208.8927 • Fax 1.888.479.2887 • www.powerscontrols.ca