

For Residential and Commercial Applications

Job Name _____

Contractor _____

Job Location _____

Approval _____

Engineer _____

Contractor's P.O. No. _____

Approval _____

Representative _____

HeatWeave® WarmWire®

120 and 240 Voltages

HeatWeave WarmWire is a series resistance heating cable assembly installed over plywood, tile backerboard, or concrete slab (according to ANSI or TCNA guidelines), and then embedded in 3/8" or greater self-leveling or polymer-modified thin-set mortar. WarmWire is approved for installation in shower applications.



Product Specifications	
Supply Voltage	120V, 1-phase 240V, 1-phase
Amp Draw	120V: 1 amp per 10 sf. 240V: 1 amp per 20 sf.
Wire Spacing	2" o.c. 2-1/2" o.c. 3" o.c.
Maximum Allowable Temperature	194°F (90°C) Continuously
EMF	Less than 1 milligauss
Heating Elements	Oxygen-free copper or nickel-copper
Insulation	ETFE Fluoropolymer
Ground Braid	Stainless Steel
Minimum Allowable Bend Radius	1/2"

WarmWire is available in various lengths with voltage options of 120 or 240 vac.

Installation Parameters

- Measure and certify the correct wire resistance (ohms) value for the heating cables, record these readings in the chart provided in the installation manual.
- Use of manufacturer's alarm meter (LoudMouth™ meter) is recommended during installation.
- Clean the subfloor.
- Secure sections of the CableStrap to the floor.
- Weave the heating cable across the floor area, fastening it to the strap. Distance between heating cables may be varied on-site to fit requirements and should average 2", 2.5", or 3" on-center.
- Install the floor sensor in accordance with installation manual.
- Install floor coverings as detailed in installation manual.

Application Parameters √		
Watt Density	2" oc	15 W/sf
	2-1/2" oc	12 W/sf
	3" oc	10 W/sf
Minimum Polymer-modified Thinset	3/8"	
Allowable Substrate	Cement backer board over wood subfloor	
	Polymer-modified setting bed over wood subfloor	
	Polymer-modified setting bed over concrete slab	
	Thin slab/self-leveling concrete over wood subfloor	
	Thin slab/self-leveling concrete over concrete slab	
Allowable Floor Coverings	Tile/Stone	
	Carpet	
	Hardwood	

IN ORDER TO AVOID PROPERTY DAMAGE, INJURY AND/OR DEATH PLEASE REFER TO THE COMPLETE INSTALLATION MANUAL AND WARNINGS PROVIDED WITH THE PRODUCT.



UL Listed for U.S. under UL Standard 1673 and Canada under CAN/CSA C22.2 No. 130-03. Listing file number E185866.


ATTENTION: Never cut the heating cable or damage it in any way. Use only the CableStrap provided, or other attachment method as described in the Installation Manual to fasten the heating cable to the floor, as other methods may damage the heating cable.

WattsRadiant™
Floor Heating & Snow Melting
A Watts Water Technologies Company


* Most anti-fracture membranes are approved for use with WarmWire. Contact manufacturer for details on specific products.

Watts product specifications in U.S. customary units and metric are approximate and are provided for reference only. For precise measurements, please contact Watts Technical Service. Watts reserves the right to change or modify product design, construction, specifications, or materials without prior notice and without incurring any obligation to make such changes and modifications on Watts products previously or subsequently sold.


HeatWeave WarmWire Application Examples

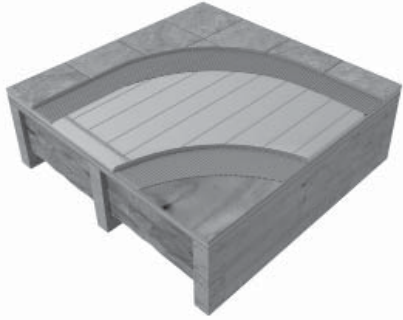

WarmWire over wood frame floor with backer board

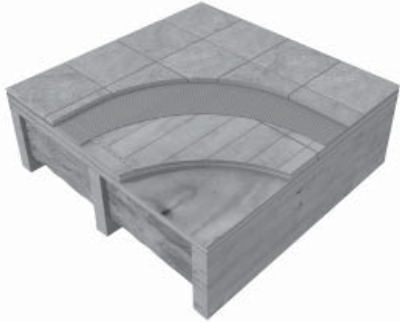


WarmWire over wood frame floor with double plywood

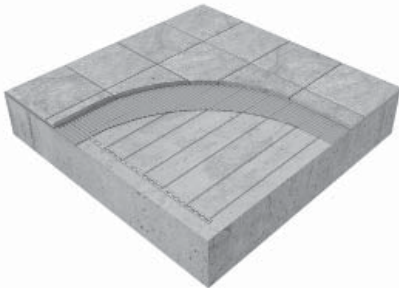


WarmWire over concrete slab.

Electrical Wiring Diagram for Single Mat with SunStat Control (120/240VAC) Dedicated 120 or 240VAC, 20-amp (maximum) circuit.

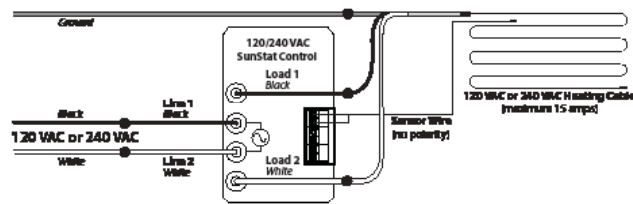

Electrical Wiring Diagram for Multiple Mats with SunStat Control (120/240VAC) Dedicated 120 or 240VAC, 20-amp (maximum) circuit.

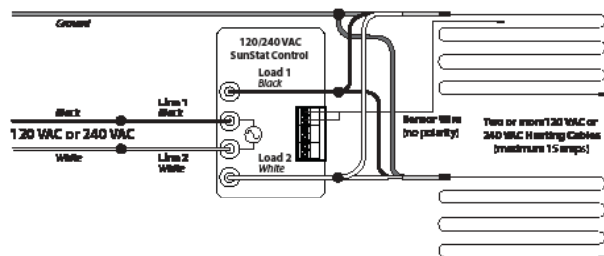

HeatWeave WarmWire Sizes 120 VAC WarmWire Spools

√ Application Parameters						
Order No.	Total sq.ft. at 2" o.c. 15 W/q.ft.	Total sq.ft. at 2.5" o.c. 12 W/q.ft.	Total sq.ft. at 3" o.c. 10 W/q.ft.	Wire Length (feet)	Amp Draw	
81008854	8	10	12	47	1.0	
81008855	12	15	18	71	1.5	
81008856	16	20	24	94	2.0	
81008857	20	25	30	118	2.5	
81008858	24	30	36	141	3.0	
81008859	18	35	42	165	3.5	
81008860	32	40	48	188	4.0	
81008861	36	45	54	212	4.5	
81008862	40	50	60	235	5.0	
81008863	48	60	72	282	6.0	
81008864	56	70	84	329	7.0	
81008865	64	80	96	376	8.0	
81008866	72	90	108	423	9.0	
81008867	80	100	120	470	10.0	

240 VAC WarmWire Spools

√ Application Parameters						
Order No.	Total sq.ft. at 2" o.c. 15 W/q.ft.	Total sq.ft. at 2.5" o.c. 12 W/q.ft.	Total sq.ft. at 3" o.c. 10 W/q.ft.	Wire Length (feet)	Amp Draw	
81008868	16	20	24	94	1.0	
81008869	24	30	36	142	1.5	
81008870	32	40	48	188	2.0	
81008871	40	50	60	236	2.5	
81008872	48	60	72	282	3.0	
81008873	56	70	84	330	3.5	
81008874	64	80	96	376	4.0	
81008875	72	90	108	424	4.5	
81008876	80	100	120	470	5.0	
81008877	96	120	144	564	6.0	
81008878	112	140	168	658	7.0	
81008879	128	160	192	752	8.0	
81008880	144	180	216	846	9.0	
81008881	160	200	240	940	10.0	

WattsRadiant[™]
Floor Heating & Snow Melting

A Watts Water Technologies Company

HW_WarmWire_Submittal_Product | EN | 20100301 | Effective: 3/1/2010

USA: 4500 East Progress Place, Springfield, MO 65803; www.wattsradiant.com
Canada: 5435 North Service Rd., Burlington, ONT. L7L 5H7; www.wattscanada.ca

Supersedes Previous Release

© Watts Radiant, 2010